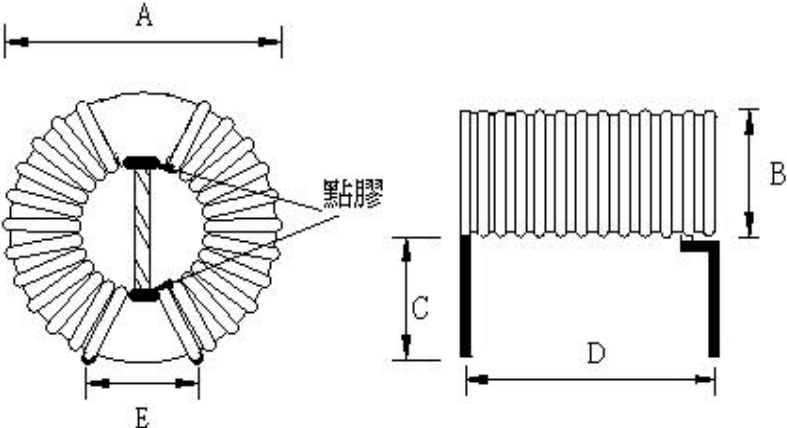


# SPECIFICATION FOR APPROVAL

CUSTOMER :	CUSTOMER'S PART NO./ DWG NO:
------------	------------------------------

ITEM / PART NO : T14\*8\*7\*Φ1.0\*7TS\*2P

<p><b>DIMENSION : (m/m)</b></p> 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">A</td><td style="text-align: center;">20.0 MAX</td></tr> <tr><td style="text-align: center;">B</td><td style="text-align: center;">12.0 MAX</td></tr> <tr><td style="text-align: center;">C</td><td style="text-align: center;">7±1 mm</td></tr> <tr><td style="text-align: center;">D</td><td style="text-align: center;">10±1.0 mm</td></tr> <tr><td style="text-align: center;">E</td><td style="text-align: center;">10±1.0 mm</td></tr> <tr><td style="text-align: center;">F</td><td></td></tr> <tr><td style="text-align: center;">G</td><td></td></tr> <tr><td style="text-align: center;">H</td><td></td></tr> <tr><td style="text-align: center;">I</td><td></td></tr> <tr><td style="text-align: center;">J</td><td></td></tr> <tr><td style="text-align: center;">K</td><td></td></tr> <tr><td style="text-align: center;">L</td><td></td></tr> <tr><td style="text-align: center;">M</td><td></td></tr> <tr><td style="text-align: center;">N</td><td></td></tr> <tr><td style="text-align: center;">O</td><td></td></tr> <tr><td style="text-align: center;">P</td><td></td></tr> </table>	A	20.0 MAX	B	12.0 MAX	C	7±1 mm	D	10±1.0 mm	E	10±1.0 mm	F		G		H		I		J		K		L		M		N		O		P	
A	20.0 MAX																																
B	12.0 MAX																																
C	7±1 mm																																
D	10±1.0 mm																																
E	10±1.0 mm																																
F																																	
G																																	
H																																	
I																																	
J																																	
K																																	
L																																	
M																																	
N																																	
O																																	
P																																	

ELECTRICAL REQUIREMENTS				TEST INSTRUMENTS	
L	575±30%	uH	1KHz/0.25V	<input type="checkbox"/> HP 4191A RF IMPEDANCE ANALYZER <input type="checkbox"/> HP 3478A MULTIMETER <input type="checkbox"/> HP 4284A <input checked="" type="checkbox"/> CH-1062	
IDC		A		<b>REMARK:</b> 注： 单面点黑胶 脚距 10±1.0 mm 排距 10±1.0 mm	
RDC	8	mΩ	MAX		
SRF		MHz			
WINDING	2UEWΦ1.0*2P*7Ts				

DRAWN BY	CHECKED BY	APPROVED BY	SAMPLE NO.
----------	------------	-------------	------------

# TEST DATA FOR PREPRODUCTION SAMPLES

CUSTOMER					CUST.P/N				
ITEM	T14*8*7-Φ1.0*7TS*2P				G. C P/N				
TEMP	23°C				SAMPLE NO.				
WIRE	2UEW Φ 1.0*2P	WINDING	7Ts		Q'TY				
TEST INSTRUMENTS		CH-100							
MEAS ITEM	L (uH)	DCR		A	B	C	D	E	
Spec. for Your	575±30%	8		20	12	7	10	10	
Spec. for Suggest	403uH ~ 747uH	mΩ							
TEST FREQ.	1KHZ/0.25V	MAX		MAX	MAX	±1.0	±1.0	±1.0	
1	656.3	4.22		17.2	9.7	6.8	10.1	10.0	
2	533.5	4.11		16.7	9.4	7.1	10.7	10.3	
3	534.5	4.14		16.7	9.4	7.3	10.2	9.9	
4	491.0	4.17		17.1	9.4	7.5	10.2	9.8	
5	612.5	4.21		17.2	9.6	7.2	10.5	10.1	
6									
7									
8									
9									
10									
X									
R									
Your Sample									
REMARK:						APPROVED BY			
						CHECKED BY			
						DRAWN BY			

# COIL SPECIFICATION

CUSTOMER		PART NO.	
PART	MATERIAL LIST	DATE	
		SPEC(TYPE)	T14*8*7-Φ1.0*7TS*2P
<b>■ MATERIAL LIST</b>			
ITEM	MATERIAL	SUPPLIER OF MATERIAL	NO.
CORE	T14*8*7-C R15K	VAKOS	
WIRE	2UEW-Ø1.0	PACIFIC ELECTRICALCO.,LTP TAYAELECTRICALCO.,LTD	
URNS	2P*7Ts( REF)		
Wire Temperature Classification	155°C		
PCB	FR4	電強	
EPOXY	黒胶	DONG GUAN HAO YUAN	